

CK-B12

HIGH-GAIN UHF RFID ANTENNA



The CK-B12 High-Gain UHF RFID Antenna delivers professional-grade performance for automated identification systems. Featuring optimized 840-960MHz frequency response and <3dB axial ratio, it ensures stable tag reading in dynamic environments.

- Operates across global UHF spectrums (840-960MHz)
- 70° H-plane beamwidth for area scanning
- -40°C~55°C Extreme Temperature Tolerance
- Compatible with EPC Gen2/ISO 18000-6C
- Universal TNC Connector for Any RFID Reader

● Specification

Model	CK-B12
 RF SPECIFICATION	
Identification Method	UHF
Frequency range (MHz)	840MHz ~ 960MHz
Protocol Support	EPC C1G2, ISO 18000-6B, ISO 18000-6C
Antenna Gain	0-33 dbm adjustable
Read Distance	0-15m adjustable
Polarization Type	Circular
Peak Gain @915MHz	12dBi
Axial Ratio	3dBI
H-plane HPBW	70
E-plane HPBW	20
VSWR	≤1.5
Impedance	50Ω
Connector Type	SMA
Size	1200*188*21mm
Weight	3.5KG

| BASIC SPECIFICATION


Material	ABS+Aluminum
Working Humidity	10%RH~90%RH
Operat Temperature	-40 ~ 55 °C
IP Rating	IP65

- **Related Model**

- **Common Solution**

Smart Library, Archival Room, Tool Room, Supermarket, etc.

- **Dimension**

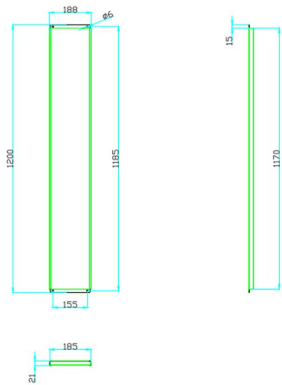

Unit : mm (inch)
Weight. : about 3.5kg

- **Accessory**

No.	item	units	quantity
1	power supply	pcs	1
2	fixed bracket	pcs	1



RFID IoT Application



Need Advice



Subscribee

Follow us: Cykeo



Headquarters

Cykeo Information Technology CO., LTD.
16th floor, Building B2, Yunzhi Science Park, Guangming District,
Shenzhen 518107, China

Factory

Shenzhen, Dongguang, Hefei

Subsidiary

Hefei Jianshen InformationTechnology Co., LTD.
Cykeo Information Technology(Shandong) Co., LTD.
Cykeo Information Technology(Chengdu) Co., LTD.
Cykeo Core Information Technology (Shanghai) Co., LTD.