

CK-BQ6025

METAL-MOUNT RFID TAG



The CK-BQ6025 flexible RFID tag combines etched aluminum antenna and PET/foam substrate for unmatched metal surface adaptability.

- 0.5mm Thickness with Dry Inlay Design
- 8m Read Range on Metal (UHF 902-928MHz)
- ISO 18000-6C & EPC Gen2 Compliance
- 10-Year Data Retention & 100K Write Cycles

- Specification


Model	CK-BQ6025
RF SPECIFICATION	
Identification Method	UHF
chip	IMPINJ Monza R6-P
Frequency Range	840MHz ~ 960MHz
Protocol	EPC C1G2, ISO 18000-6B, ISO 18000-6C
Base material	PET
Memory	
EPC	128bits
User	64bit
TID	96 bits
BASIC SPECIFICATION	
size	60x25mm
IC Life	100, 000 Programming cycles, 10years data retention
Read range	8 M
Operating Temperature	-40°C to +85°C
Humidi	20% to 90%
Storag	-25°C to +50°C

- **Related Model**

- **Common Solution**

Smart Library, Archival Room, Tool Room, Supermarket, etc.

- **Dimension**

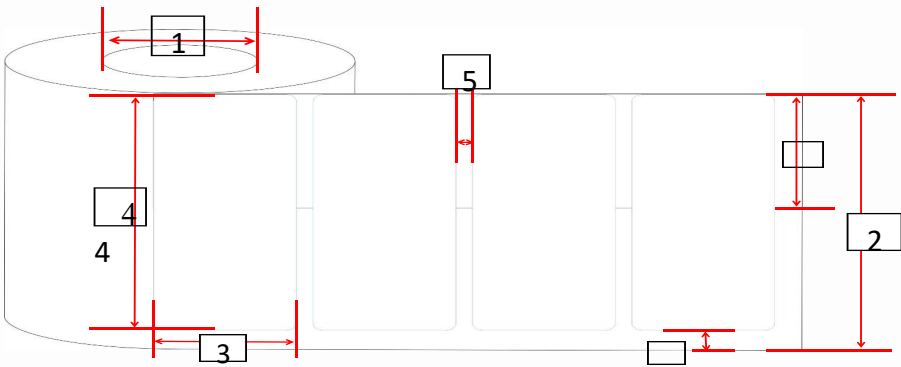

Unit : mm (inch)
Weight. : about 0.1g

- **Accessory**

No.	item	units	quantity



RFID IoT Application



Need Advice



Subscribee

Follow us: Cykeo



Headquarters

Cykeo Information Technology CO., LTD.

16th floor, Building B2, Yunzhi Science Park, Guangming District,
Shenzhen 518107, China

Factory

Shenzhen, Dongguang, Hefei

Subsidiary

Hefei Jianshen InformationTechnology Co., LTD.

Cykeo Information Technology(Shandong) Co., LTD.

Cykeo Information Technology(Chengdu) Co., LTD.

Cykeo Core Information Technology (Shanghai) Co., LTD.