

CK-TP1

Manual Operation Door Tunnel Type Batch RFID Reader Machine



Manual Operation Door Tunnel Type Batch RFID Reader Machine is used in tool room, production workshop, logistics warehouse and other. In the case of bulk storage or shipment of RFID tag items, rapid, large quantities, accurate scanning and reading, verifying the binding of items and RFID tags, greatly saving labor costs, shortening the time of entering and leaving the warehouse and improving the efficiency of inventory.

- 21.5-inch colorful touch screen with 1920 x 1080 resolution
- RFID technology 840~960MHz optional, support protocol extension
- Multiple interfaces: RJ45, RS232, support wifi, 4G, alarm input etc
- Integrated audible and visual alarm, available online / offline EAS alarm
- Support face recognition, space sensor, optional Windows / Android system
- Product appearance, function, protocols etc support customization

● Specification

Model	CK-TP1
 RF SPECIFICATION	
Identification Method	UHF
RF Chip	Impinj R2000
Frequency Range	840MHz ~ 960MHz adjustable
Protocol	EPC C1G2, ISO 18000-6B, ISO 18000-6C
Frequency Band (Optional)	ETSI: 865 ~ 868MHz, JP: 916.8 ~ 920.4MHz, TW: 922.25~927.75MHz, ID: 923.125~925.125MHz, RUS: 866.6~867.4 MHz, TEST: 802.75~998.75MHz, JP_LBT: 916.8~920.8MHz
Product Capacity	1000 pcs (according of item size)
Recognition Response	1-5 seconds
Function	RFID read function, Multiple label identification, Label data filtering, RSSI perception, Quantity statistics
 HARDWARE SPECIFICATION	
System Support	Windows / Android (optional)
Hardware	I5 CPU, 4G RAM, 128G ROM RK3399 CPU, 4GRAM, 16G ROM (optional)
Display	1920 × 1080, 14-inch capacitive touch screen (21-inch optional)
Communication	RJ45 10/100Mbps
 FUNCTION SELECTION	
RFID Card Reader	Standard
Bar Code	Optional
QR Code	Optional
Fingerprint Recognition	Optional
Face Recognition	Optional

CCTV Camera	Optional
Solar Energy	Optional
Sound Light Alarm	Optional
Wireless Network	WiFi / 4G


| BASIC SPECIFICATION

Material	Carbon steel plate, Glass
Power Supply	AC 110-220V 50Hz 50W
Working Humidity	10%RH~90%RH
Operat Temperature	0 °C ~ 60 °C
Size	122 x 145 x 220 cm

- **Related Model**
CK-GT1

- **Common Solution**
Smart Library, Archival Room, Tool Room, Supermarket, etc.

- **Dimension**

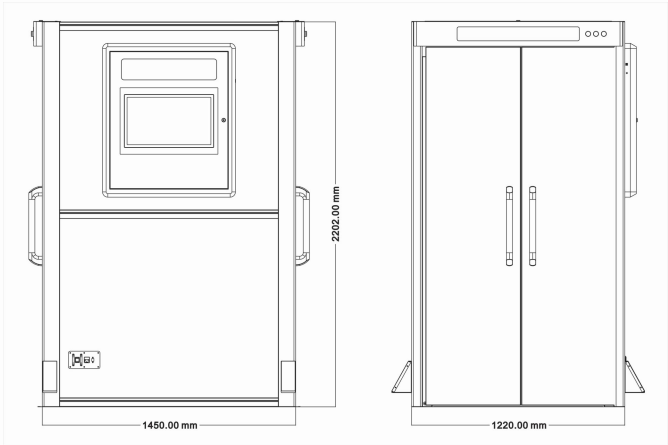

Unit : mm (inch)
Weight. : about
200kg

- **Accessory**

serial number	name	units	quantity
1	power supply	pcs	1



RFID IoT Application



Need Advice



Subscribee

Follow us: Cykeo



Headquarters

Cykeo Information Technology CO., LTD.

16th floor, Building B2, Yunzhi Science Park, Guangming District,
Shenzhen 518107, China

Factory

Shenzhen, Dongguang, Hefei

Subsidiary

Hefei Jianshen InformationTechnology Co., LTD.

Cykeo Information Technology(Shandong) Co., LTD.

Cykeo Information Technology(Chengdu) Co., LTD.

Cykeo Core Information Technology (Shanghai) Co., LTD.