

CYKEO-D3L

USB RFID Tag Reader



New desktop tag card reader for RFID tags and items binding initialization, with readable and writable functions, switch cursor output mode, easy to organize Excel documents

- Support fast reading and writing, Identify 100pcs at a time, batch export label information files
- RFID technology 840~960MHz optional, support protocol extension
- Near-field antenna, effective reading range of 40cm, write range of 10cm
- Communication interfaces: USB Type-C
- Work condition warning beep

## ● Specification

Model	CYKEO-D3L
<b>  RF SPECIFICATION</b>	
Identification Method	UHF
RF Chip	Impinj R500
Frequency Range	840MHz~960MHz
Protocol Support	EPC C1G2, ISO 18000-6B, ISO 18000-6C
Frequency Band (Optional)	ETSI: 865~868MHz JP: 916.8~920.4MHz TW: 922.25~927.75MHz ID: 923.125~925.125MHz RUS: 866.6~867.4 MHz TEST: 802.75~998.75MHz JP_LBT: 916.8~920.8MHz
Antenna Gain	1-30 dbm adjustable
Read Distance	40 cm adjustable
Communication	USB Type-C
Function	RFID read & write, Multiple label identification (For more RFID tag features, please use Cykeo tag application software)
<b>  BASIC SPECIFICATION</b>	
Material	Aluminum
Power Supply	DC 5V
Working Humidity	10%RH~90%RH
Operat Temperature	0 °C ~ 60 °C
Size	32 x 36 x 2 cm
Weight	About 600g


- **Related Model**

CYKEO-D1L, CYKEO-D2L, CYKEO-D4L

- **Common Solution**

Smart Library, Archival Room, Tool Room, Supermarket, etc.

- **Dimension**

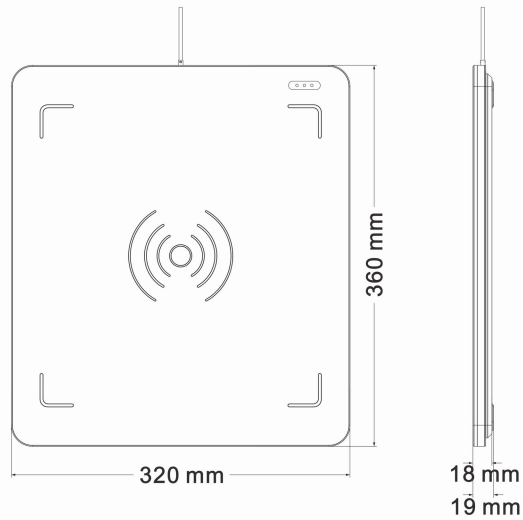

Unit : mm (inch)  
Weight. : about 600g

- **Accessory**

No.	Item	units	quantity
1	USB A-C Cable	pcs	1



# RFID IoT Application



Need Advice



Subscribe

Follow us: [Cykeo](#)



## Headquarters

Cykeo Information Technology CO., LTD.  
16th floor, Building B2, Yunzhi Science Park, Guangming District,  
Shenzhen 518107, China

## Factory

Shenzhen, Dongguang, Hefei

## Subsidiary

Hefei Jianshen InformationTechnology Co.,  
LTD.  
Cykeo Information Technology(Shandong) Co., LTD.  
Cykeo Information Technology(Chengdu) Co., LTD.  
Cykeo Core Information Technology (Shanghai) Co., LTD.