

● Specification

Model	CYKEO-M16
 RF SPECIFICATION	
Identification Method	UHF
RF Chip	Impinj R2000
Frequency Range	840MHz~960MHz
Protocol	EPC C1G2, ISO 18000-6B, ISO 18000-6C, GB/T29768-2013 (optional)
Frequency Band (Optional)	ETSI: 865~868MHz, JP: 916.8~920.4MHz, TW: 922.25~927.75MHz, ID: 923.125~925.125MHz, RUS: 866.6~867.4 MHz, TEST: 802.75~998.75MHz, JP_LBT: 916.8~920.8MHz (Please tell our sales which band do you want before ordering)
Modulation mode	DSB-ASK, PR-ASK
RF Interface	16 MMCX
RF Interface Power	33dbm+-1dbm (Max)
R/W Capability	Read: 0-1500 cm ; Write: 0-700 cm ; 600+ pcs/s
Communication	15-PIN I/O
Function	RFID read & write, Multiple label identification, Label data filtering, Quantity statistics, RSSI perception, RF power regulation
 BASIC SPECIFICATION	
Material	Aluminum
Working Humidity	10%RH~90%RH
Operat Temperature	0 °C ~ 60 °C
Size	8.2x17. x0.7cm


- Related Model

CYKEO-M1, CYKEO-M8, CYKEO-M4

- Common Solution

Smart Library, Archival Room, Tool Room, Supermarket, etc.

- Dimension

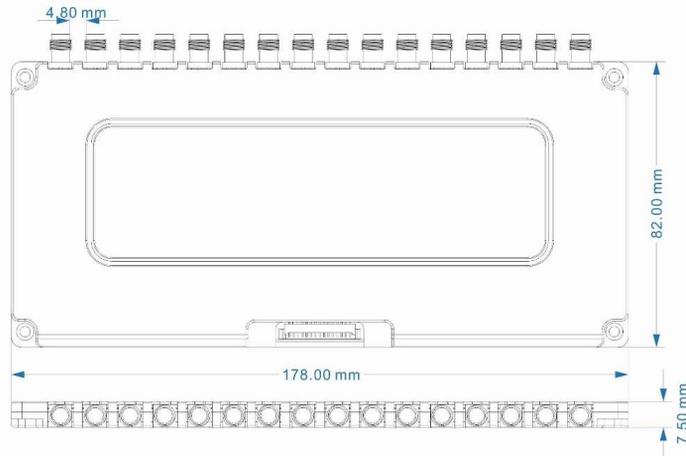

Unit : mm

Weight. : about 600g

- Accessory

serial number	name	units	quantity



RFID IoT Application



Need Advice



Subscribe

Follow us: [Cykeo](#)



Headquarters

Cykeo Information Technology CO., LTD.
16th floor, Building B2, Yunzhi Science Park, Guangming District,
Shenzhen 518107, China

Factory

Shenzhen, Dongguang, Hefei

Subsidiary

Hefei Jianshen InformationTechnology Co.,
LTD.
Cykeo Information Technology(Shandong) Co., LTD.
Cykeo Information Technology(Chengdu) Co., LTD.
Cykeo Core Information Technology (Shanghai) Co., LTD.